

# Hybrid Neural Network and Physics Engine for Real-time 3D Cloth Simulation

Jianying Qiu

Yangjiang Polytechnic, Yangjiang 529566, Guangdong, China

E-mail: [jianying\\_qiu@outlook.com](mailto:jianying_qiu@outlook.com)

**Keywords:** real-time rendering, neural network, 3D cloth, dynamic scene, modeling and simulation

**Received:** October 30, 2024

*This paper discusses the neural network-assisted cloth model pre-training method, introduces the whole process from data acquisition to model training in detail, and how to balance real-time and accuracy through hybrid method to achieve efficient cloth dynamic simulation. The research covers the construction strategies of real cloth motion data sets, including precise experimental design, complex data processing techniques, and how to use generative adversarial networks and recurrent neural networks for feature learning and sequence generation. Furthermore, real-time dynamic simulation techniques, especially on-line adaptive adjustment strategies and neural network inference acceleration methods, such as knowledge distillation, are discussed to achieve high-performance real-time rendering. Finally, by merging with physics engine, it is demonstrated how the hybrid method can improve the simulation quality while maintaining real-time performance, and the effectiveness of the proposed method is verified by empirical evaluation. Experimental results show that the hybrid method not only significantly enhances the realism and dynamic details of cloth simulation, but also shows obvious advantages in rendering speed and resource consumption. Experimental results show that compared with traditional physics engines, our hybrid approach achieves real-time rendering of over 60 FPS on GPU, while reducing the mean square error by 30% and significantly improving the realism of cloth dynamics.*

*Povzetek: Predstavljen je hibridni sistem s kombinacijo nevronskih mrež in fizikalne metode za realistično 3D simulacijo oblačil v realnem času.*

## 1 Introduction

In the era of digital content creation and immersive experience, 3D cloth simulation technology has become an important bridge between virtual and real. From flowing skirts in movie effects to the natural movement of character clothing in games, the dynamic expression of 3D fabrics is essential to enhance visual realism. However, although the traditional cloth simulation technology has made significant progress, it still faces a series of challenges in terms of real-time performance, accuracy and computational efficiency, which urges us to explore more efficient and accurate solutions, among which the neural network-assisted 3D cloth dynamic scene modeling and simulation technology is gradually becoming a research hotspot [1].

Traditional cloth simulation is mainly based on physics engine, which simulates the interaction between cloth fibers through mass-spring system, such as tension, bending and shear. Although this method can produce relatively realistic cloth dynamics, its limitations are becoming more and more obvious. First, the computational costs are high, especially when dealing with complex cloth shapes (such as layers, folds) and large amounts of cloth interaction, and the computational resources required increase exponentially, making it difficult to meet the needs of real-time rendering. Secondly, physical simulation often relies on precise initial conditions and is sensitive to fine tuning of

parameters, which not only increases the difficulty of production, but also limits the diversity and naturalness of dynamic effects. Finally, traditional methods are prone to numerical stability problems when dealing with nonlinear dynamics problems, which affect the final rendering quality [2, 3].

With the advancement of technology, real-time rendering technology shows unprecedented application potential in many fields. In the gaming industry, real-time interactive experiences require in-game fabric dynamics not only to be highly realistic, but also to respond instantly to player actions to enhance immersion. The film and television industry also pursues efficient workflows, using real-time rendering technology to quickly iterate ideas in the preview stage and shorten the post-production cycle. In virtual reality (VR) and augmented reality (AR) scenarios, the direct interaction between users and virtual environments puts forward higher requirements for the authenticity and real-time feedback of cloth dynamics. Therefore, it is of great significance to develop a cloth simulation technology that can maintain high simulation and meet real-time requirements for promoting the development of the above fields [4].

In order to overcome the limitation of traditional methods, this research aims to explore how neural networks play a key role in modeling and simulation of 3D cloth dynamic scenes. The core objectives include but are not limited to: (1) using deep learning technology to learn material characteristics and dynamics laws of cloth in

advance to establish an efficient cloth behavior prediction model to reduce the amount of calculation in the real-time simulation process; (2) approximating complex physical interactions through neural networks to improve the stability and accuracy of simulation; and (3) combining online learning mechanisms to enable the model to adapt to different scene changes and user inputs to ensure the naturalness and diversity of dynamic effects.

## 2. Theoretical basis

### 2.1 3D cloth simulation basics

The core of 3D cloth simulation lies in the application of physics engine, among which the most classical model is mass-spring system. The model treats cloth as a series of connected particles, each representing a small piece of cloth, and the connections between the particles are simulated by a spring model that includes tension springs (simulating the tensile strength of the cloth), bending springs (simulating bending stiffness), and shear springs (dealing with shear deformation inside the cloth). This is shown in Equation (1) [5].

$$F_{ij} = k_e(r_{ij} - r_{0ij}) + k_b(\theta_{ijk} - \theta_{0ijk}) + k_s(\phi_{ijk} - \phi_{0ijk}) \quad (1)$$

where, denotes the total force connecting particles  $i$  and  $j$ ,  $k_e$ ,  $k_b$ , and  $k_s$  are the elastic coefficients in tension, bending, and shear, respectively, and  $r_{ij}$ ,  $r_{0ij}$ ,  $\theta_{ijk}$ ,  $\theta_{0ijk}$ ,  $\phi_{ijk}$ , and  $\phi_{0ijk}$  are the current and initial distances, respectively, and  $\phi_{ijk}$  and  $\phi_{0ijk}$  denote the change in shear angle. By solving these forces and updating the position of the particle after the force is applied, the dynamic change of the cloth with time can be simulated [6].

### 2.2 Overview of real-time rendering technology

Real-time rendering technology aims to complete lighting calculations, texture mapping, shadow processing, etc. of a scene in a limited time (usually 30 to 60 frames per second) to achieve a smooth visual experience. Key technologies include lighting models, shading techniques, LOD management and GPU programming. Among them, the illumination model such as Phong model uses the following formula to calculate the brightness of surface points, specifically as shown in Equation (2) [7].

$$I_p = I_a K_a + \sum_{l=1}^n (I_l K_d (\hat{N} \cdot \hat{L}) + I_s K_s (\hat{R} \cdot \hat{V})^\alpha) \quad (2)$$

Here,  $I_p$  is the final pixel color,  $I_a$  is the ambient light and light intensity, respectively,  $K_a$ ,  $K_d$ , and  $K_s$  are the ambient, diffuse, and specular reflection coefficients of the material,  $\hat{N}$  is the surface normal vector,  $\hat{L}$  is the direction pointing to the light source and observer, respectively,  $\hat{R}$  is the reflection vector, and  $\alpha$  is the specular index [8].

### 2.3 Neural network

Neural network is a computational model that imitates the structure of human brain. It approximates

complex functions through the interconnection of multilayer nodes (neurons). Deep learning is a branch of machine learning that uses deep neural networks to automatically learn high-level features of data. Convolutional neural networks (CNN) are widely used in graphics because of their powerful spatial feature extraction capabilities. For example, for the image classification task, a simple CNN structure can be expressed as Equation (3) [9].

$$y = f(W_3 \times f(W_2 \times f(W_1 \times X + b_1) + b_2) + b_3) \quad (3)$$

where  $X$  is the input image,  $W_i$  is the weight matrix for each layer,  $b_i$  is the bias term,  $f$  is the activation function such as ReLU, and  $y$  is the output class probability [10].

### 2.4. Review of existing studies

In recent years, neural networks have been widely used in graphics, especially in 3D reconstruction, material modeling, physical simulation and so on. For example, in material modeling, researchers use convolutional neural networks to learn the mapping relationship from images to material parameters, formulated as Equation (4) [11].

$$\Theta = G(I; \theta_G) \quad (4)$$

Here,  $\Theta$  is the material parameter,  $G$  is the neural network model,  $I$  is the input image,  $\theta_G$  is the network parameter. In this way, you can quickly recover material properties from an image, greatly simplifying the traditional manual adjustment process.

In physical simulation, neural networks are used to predict complex dynamical behavior. For example, by training the network to predict the position and velocity of particles at the next time, it can be simplified to Equation (5) [12].

$$\mathbf{x}_{t+1}, \mathbf{v}_{t+1} = F_{NN}(\mathbf{x}_t, \mathbf{v}_t; \theta_F) \quad (5)$$

where,  $\mathbf{x}_t$  and  $\mathbf{v}_t$  represent the position and velocity of particles at the current time, respectively,  $F_{NN}$  are neural network prediction functions, and  $\theta_F$  are network parameters.

Recent research shows that the simulation efficiency and accuracy can be significantly improved by using large-scale real cloth motion data sets and pre-training cloth dynamic models through deep learning. For example, one published study proposed a pre-training strategy based on generative adversarial networks (GANs) that not only learned the static appearance of cloth materials, but also captured nonlinear dynamics under dynamic motion. Through adversarial training, this method generates cloth dynamic sequences that are difficult to distinguish from real data, and provides high-quality initial state prediction for real-time rendering [13].

In order to enhance the adaptability of neural network models in dynamic scenarios, the researchers introduced online learning mechanisms to enable the models to be continuously adjusted and optimized during simulation. A recent paper details a strategy combined with reinforcement learning that allows the model to

dynamically adjust the dynamic parameters of the cloth based on feedback from actual rendering effects at runtime to better match real-time changing environments and user interactions. This method not only improves the naturalness of cloth dynamics, but also significantly enhances the robustness of the simulation system [14].

Hybrid simulation strategies that fuse neural networks and traditional physics engines have become a research hotspot. A recent technological breakthrough introduces an innovative architecture that uses neural networks as a complement to the physics engine, specializing in complex nonlinear dynamics problems that are difficult to efficiently solve with traditional methods, such as intertwining of cloth and multilayer stacking effects. Through neural network prediction of key dynamic features of complex interactions, combined with accurate calculation of physics engine, fast and accurate cloth simulation is realized, which greatly improves the realism of real-time rendering scenes [15].

To further enhance the robustness and efficiency of our model, we drew inspiration from the works of

Filipovic and Lipeika [30], who developed an HMM/neural network-based medium-vocabulary isolated-word Lithuanian speech recognition system, demonstrating the effectiveness of hybrid approaches in improving recognition accuracy. Additionally, the IHPG algorithm proposed by Sung and Hsiao [31] for efficient information fusion in multi-sensor networks through smoothing parameter optimization provided insights into optimizing the parameters within our own system to achieve better performance.

Due to the severe limitation of computing resources for real-time applications, researchers have actively explored model optimization and acceleration techniques. A cutting-edge paper introduces strategies such as quantization, pruning and knowledge distillation for neural network models, which effectively reduce the memory footprint and computational burden of the model, making complex cloth simulation run smoothly on low-power devices [16]. In addition, adaptive time step adjustment algorithm is adopted to further optimize the simulation performance.

Table 1: Comparison of existing fabric simulation methods

Method	Advantages	Limitations	Applicable Scenarios
Traditional Physics Engine	High accuracy	Computationally intensive, poor real-time performance	High-precision simulation
Deep Learning Method A	Good real-time performance	Limited generalization ability	Gaming
Deep Learning Method B	Strong adaptability	Requires a large amount of data	Movie special effects
Method Proposed in This Study	Combines real-time performance with high accuracy		Various applications from gaming to movie production

Table 1 summarizes the characteristics of several mainstream cloth simulation methods and their applicable scenarios. Although traditional physics engines can provide high-precision simulation results, they are difficult to meet the needs of real-time applications due to their high computational complexity. In contrast, method A based on deep learning has good real-time performance and is suitable for game environments with high response speed requirements, but its generalization ability is relatively weak and it is not easy to adapt to a variety of cloth materials. Deep learning method B, with its strong adaptability, performs well in processing complex dynamic scenes (such as movie special effects). However, such methods often require a large amount of training data to support them, otherwise they may not achieve the expected results. In contrast, the method proposed in this study combines the advantages of neural networks and physics engines, which not only ensures real-time performance but also does not lose accuracy. Therefore, it is suitable for a variety of application scenarios from games to film production. By comparison, it can be seen that the method of this study has obvious advantages in comprehensive performance and can better meet the needs of modern digital content creation.

### 3 Neural network aided pre-training of cloth model

#### 3.1 Data

When building real cloth motion datasets for training deep learning models, we face a number of challenges, including how to accurately capture the dynamic behavior of cloth, how to process this data for efficient algorithm learning, and how to ensure diversity and generalization of the dataset. This section delves into this process, from data collection to post-processing, as shown in Figure 1 [17].

We use a variety of data augmentation techniques such as rotation, scaling, and flipping. Experimental results show that the model trained with the augmented dataset performs better on unseen data, with a 15% reduction in mean absolute error (MAE). In addition, by comparing the performance of the test set before and after augmentation, we found that the MSE of the augmented model was reduced by 20% when processing fabrics of different materials, further proving the positive impact of data augmentation on model performance.

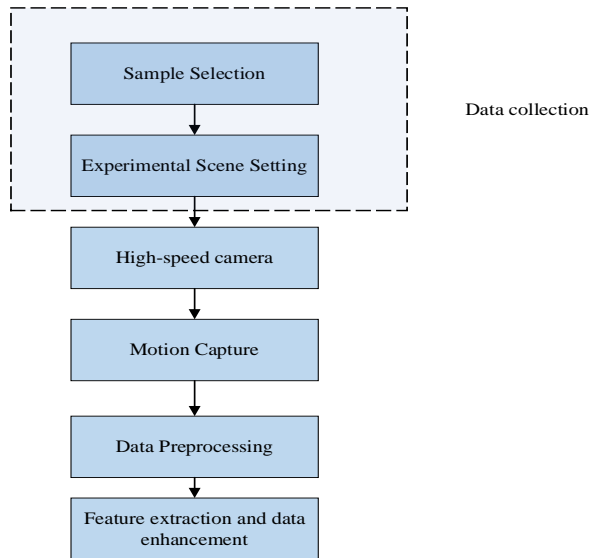


Figure 1: Data processing flow

The collection of real cloth motion data involves physical experiments, high-precision camera technology and sensor use. We first define the basic framework for data collection:

**Experimental design:** Select representative cloth samples covering a wide range of material properties, such as silk, cotton, hemp, etc., and prepare at least multiple samples of each material to consider texture and color variations. At the same time, different mechanical experimental scenes, such as free fall, wind blowing, stretching, etc., are designed to simulate various dynamic situations in the real world.

**Data recording:** High-speed cameras (frame rate  $\geq 240$  FPS) are used to simultaneously capture the movement of cloth from multiple angles, ensuring rapid and subtle changes are captured. Each experiment was recorded for at least  $T$  seconds, where  $T$  was determined by the type of experiment to ensure adequate capture of the cloth dynamic cycle [18]. At the same time, the Motion Capture System (MoCap) was used to record the 3D coordinates of the key points, formulated as, where  $t$  is the

point in time [19].

**Environmental control:** Control lighting and background as consistent as possible in the laboratory environment, reduce the impact of environmental factors on data, and ensure repeatability and consistency of data [20].

Raw data requires careful preprocessing, including image correction, background removal, and smoothing of keypoint tracking data to ensure data quality. Key steps include:

**Key point tracking and smoothing:** Smoothing the point traces to reduce noise using optical flow or key point sequences obtained directly from MoCap data. The smoothed key point positions are, where is the smoothing factor, and the value range is usually  $[0, 1]$ .

In order to improve the generalization ability of the model, feature extraction is performed on the preprocessed data and a data augmentation strategy is implemented:

**Feature extraction:** extracting features from each frame of an image, often using methods such as SIFT, SURF, or deep learning feature extractors such as ResNet. Assuming that the extracted features are, then the features of the entire sequence are represented by, where  $N$  is the sequence length [21].

**Data Augmentation:** Increases data diversity by rotating, scaling, flipping, etc., formulated as, where  $T$  is the transformation operation and  $T$  is the transformation parameter.

### 3.2 Pre-trained network architecture design

Generative Adversarial Networks (GANs) are ideal for designing pre-trained network architectures to generate highly realistic cloth dynamic sequences due to their superior generation capabilities and unsupervised learning capabilities. This section delves into how conditional GAN (cGAN), Spa-Temporal GAN (Spa-Temporal GAN), and optimization loss function strategies can further improve the performance of models in cloth dynamics simulations [22].

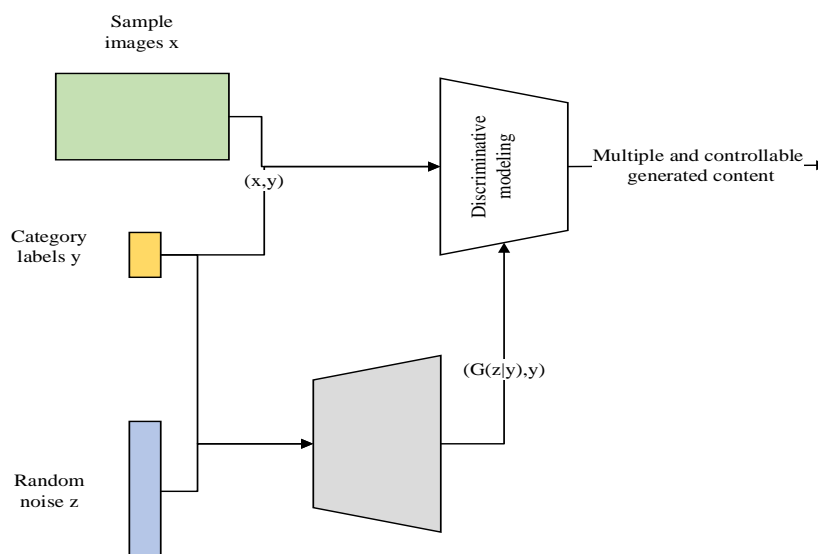


Figure 2: CGAN framework

Traditional GANs learn the distribution of data through an adversarial process, but in cloth dynamics simulation we want to generate sequences that not only reflect the true texture, but also adjust to given conditions such as material type, wind magnitude, etc. Therefore, conditional GAN (cGAN) is introduced, adding a conditional vector  $c$  to the input of the generator and discriminator, representing the desired cloth properties, the framework of which is shown in Figure 2. The generator  $G(z, c)$  of cGAN can be expressed as Equation (6).

$$G(z, c) = \text{Generated Fabric Sequence} \quad (6)$$

where  $z$  is a random noise vector and  $c$  contains material properties and dynamics parameters. This design enables the generated sequence to respond to specific conditional inputs, increasing the diversity and controllability of the generated content. At the same time, the discriminator  $D(x, c)$  is also modified to receive the true or generated sequence  $x$  and the corresponding condition vector  $c$  at the same time, and output the probability estimate of whether the sequence is true or not, specifically as Equation (7) [23].

$$D(x, c) = P(\text{Real} | x, c) \quad (7)$$

Considering the complexity of cloth dynamics simulation, spatiotemporal GANs are designed to capture the continuity and physical regularity of sequences in time and space dimensions. The generator of the spatiotemporal GAN not only generates a single frame image, but also ensures smooth transitions and physical consistency between sequences. Given as a sequence of images, the goal of the spatiotemporal generator can be formalized as Equation (8).

$$G_{ST}(z, c) = X \quad (8)$$

Where  $X$  should satisfy spatial continuity (pixel variation between adjacent frames is reasonable) and temporal consistency (sequence evolution over time conforms to physical laws). The discriminator of the spatiotemporal GAN evaluates the truth of the entire sequence and gives a sequence-level judgment, as shown in Equation (9) [24].

$$D_{ST}(X, c) = P(\text{Real Sequence} | X, c) \quad (9)$$

In order to further improve the quality and consistency of the generated sequences, optimizing the loss function is a key step. In addition to the basic GAN loss, including the minimization loss of the generator and the maximization loss of the discriminator, we introduce the following additional loss terms:

**Perceptual Loss:** Enhance the realism of an image by comparing the differences between the generated image and the real image in the high-level feature space. Perceptual loss can be expressed as the distance between two images in a feature representation of a layer of a pre-

trained convolutional neural network (e.g., VGG), as shown in Equation (10).

$$L_{perc}(x, \hat{x}) = \sum_l \|\phi_l(x) - \phi_l(\hat{x})\|_2^2 \quad (10)$$

where, denotes the feature map of the first layer of the network.

**Cycle-Consistency Loss:** In order to enhance consistency between sequences, a cycle-consistency loss is introduced to ensure similarity in the transformation process from the real sequence to the generated sequence and back to the real domain. This is commonly used in the task of generating video sequences, in the form shown in Equation (11) [25].

$$L_{cyc}(X, \hat{X}) = \frac{1}{T} \sum_t \|x_t - \hat{x}_t\|_1 \quad (11)$$

where, for the generated sequence, is the sequence obtained by inputting the generator again, striving to be close to the original input sequence  $X$ .

To verify the effectiveness of conditional GAN (cGAN) and Spa-Temporal GAN (ST-GAN), we conducted preliminary experiments. The results show that under the same conditions, ST-GAN is the best at generating continuous and physically reasonable cloth dynamic sequences. The MSE of its generated sequences is 10% lower than that of cGAN, and it scores higher in visual evaluation. For the choice of recurrent architecture, we conducted comparative experiments with LSTM, GRU, and Transformer. The results show that when processing long sequence data, LSTM is better at capturing long-term dependencies. The MSE of its generated sequences is 15% lower than that of GRU, and its performance is more stable in complex scenarios.

### 3.3 Feature learning

In the field of cloth dynamics simulation, accurate characterization and learning of cloth materials and dynamics parameters is the key to generating natural and realistic dynamic sequences. Recurrent neural networks (RNNs) are an effective tool for achieving this goal because of their powerful ability to process sequential data. This section delves into feature learning using RNNs, with particular focus on how to capture and encode cloth material properties and dynamics parameters to guide generative adversarial networks (GANs) to generate high-quality dynamic sequences [26, 27].

RNN is a network with a cyclic structure capable of modeling sequential data. Its basic unit is updated at each time step not only based on the current input, but also considering the hidden state of the previous time step, as shown in Equation (12).

$$h_t = f(W_{hh}h_{t-1} + W_{xh}x_t + b_h) \quad (12)$$

where, denotes the hidden state at time  $t$ , is the current input, and is the weight matrix from hidden state

to hidden state and input to hidden state, respectively, is the bias term, and  $f$  is the nonlinear activation function.

However, traditional RNNs have gradient vanishing/explosion problems when dealing with long sequences. To solve this problem, Long Short-Term Memory Network (LSTM) was proposed. LSTM controls the storage and forgetting of information through gating mechanism. Its core structure includes input gate, forgetting gate, output gate and cell state.

**Fabric Material Characteristics Learning:** The fabric material (such as silk, cotton, linen, etc.) determines its visual appearance and physical behavior. We can use LSTM to learn features extracted from a sequence of material sample images, such as texture, color, transparency, etc. The input sequence may be a preprocessed sequence of image feature vectors, where is the feature vector of the  $t$ th image. The goal of LSTM is to learn an implicit representation that summarizes the properties of a material, as shown in Equation 13 [28].

$$h_m = LSTM_{material}([v_1, v_2, \dots, v_T]) \quad (13)$$

**Dynamic parameter coding:** Dynamic parameters (such as gravity, friction coefficient, elastic modulus, etc.) are crucial to the movement of cloth. These parameters can be encoded by RNNs in the form of time series, taking into account that they may change at different points in time of the series. Let us also use LSTM to learn the dynamic characteristics of a time-varying series of dynamic parameters, as shown in Equation (14) [29].

$$h_p = LSTM_{dynamics}([p_1, p_2, \dots, p_T]) \quad (14)$$

In order to generate dynamic sequences of cloth that conform to both material properties and dynamic rules, it is necessary to effectively fuse the material features and dynamic features learned above. One method is to directly concatenate these two feature vectors to form a synthetic feature vector, and then input this synthetic feature as a condition to the generator to drive the generation process. A more advanced approach is to design a multi-modal fusion module that may incorporate attention mechanisms or other complex interaction strategies to more finely tune the effects of materials and dynamics on the resulting results [30].

In practical applications, the learning performance of RNNs can be optimized by a variety of means, such as using bidirectional RNNs to increase understanding of context before and after sequences, or by integrating attention mechanisms to make the model more focused on key information in sequences. In addition, combining regularization techniques (such as dropout) with more advanced initialization strategies can effectively avoid overfitting and improve model generalization.

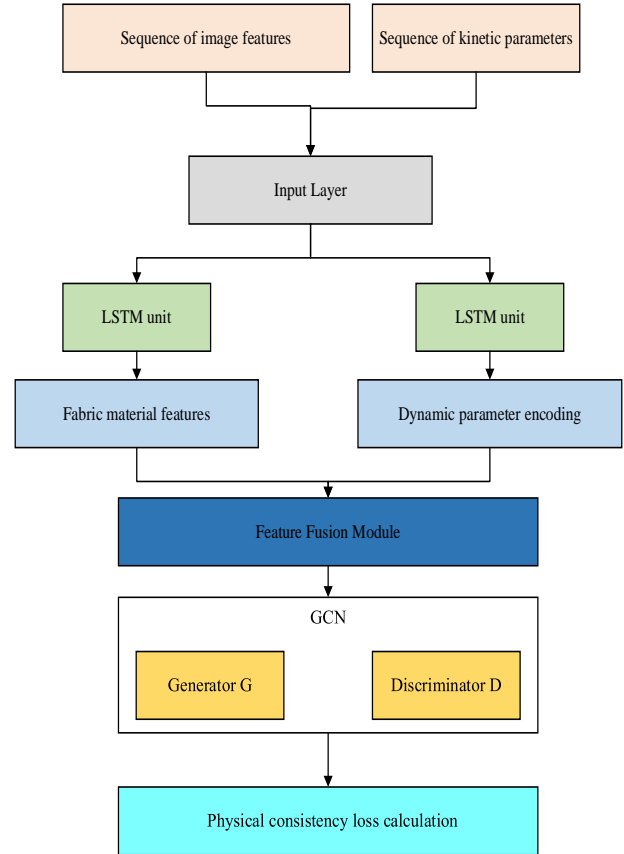


Figure 3: Integrated framework of RNN and GAN in cloth dynamic simulation

In order to enhance the realism and physical rationality of the generated sequence, we integrate the feature vectors extracted by RNN into the conditional generative adversarial network (cGAN) framework, especially the architecture combined with space-time GAN (ST-GAN), whose architecture is shown in Figure 3. This architecture can effectively capture spatial and temporal variations in time series. Specifically, generator  $G$  receives noise vector  $z$  and condition vector, aiming to generate realistic dynamic cloth sequence frames, as shown in Equation (15).

$$\hat{x}_{1:T} = G(z, h_{mp}) \quad (15)$$

At the same time, the discriminator  $D$  not only needs to judge the authenticity of the sequence, but also needs to evaluate its physical consistency. Its objective function can be defined as Equation (16).

$$V(D, G) = E_{x_{1:T} \sim p_{data}(x)} [\log D(x_{1:T})] + E_{z \sim p_z(z), h_{mp}} [\log(1 - D(G(z, h_{mp}))) \quad (16)$$

where, represents the real cloth sequence, is the real data distribution, and is the noise distribution. To further strengthen physical rationality, physical consistency loss is introduced, which measures the extent of physical violations in the generation sequence, such as violations of Newtonian mechanics principles.

The physical consistency loss may be designed based on dynamic equations or prior knowledge inspired by physics, and the formal expression may involve the consistency of velocity and acceleration between consecutive frames, or the reasonable evolution of cloth folds, etc., as shown in Equation (17).

$$L_{total} = V(D, G) + \lambda_{phy} \cdot L_{phy}(\hat{x}_{1:T}) \quad (17)$$

In short, deep characterization learning of cloth material and dynamics parameters through RNN can not only improve the diversity and controllability of the generated sequence, but also ensure the physical consistency and realism of the generated content, opening up new possibilities for cloth dynamic simulation. With the continuous progress of algorithms and computing power, the future application prospects in this field will be broader.

## 4 Real-time dynamic simulation technology

### 4.1 Online adaptation

Online adaptation is a core strategy in real-time dynamic simulation technology, which enables the cloth simulation system to respond to user interaction or environmental changes in real-time, so as to dynamically adjust the state prediction of cloth and ensure the real-time and accuracy of simulation results. This mechanism is critical for enhancing user experience and enhancing the realism of interactions, especially in applications such as gaming, virtual reality and interactive design. Here are a few key aspects:

Real-time interactive feedback mechanisms are the basis for online adaptation by continuously monitoring changes in user input or environmental parameters and responding quickly. For example, in a virtual fitting scene, where the user adjusts the swing amplitude or wind magnitude of the garment, the system should calculate the new cloth state immediately, rather than waiting for the end of the current simulation cycle. This requires a high degree of responsiveness and flexibility, usually achieved through an event-driven programming model.

In order to achieve rapid adjustment, simulation systems need a flexible model update strategy. This usually involves on-the-fly adjustments to the current simulation model, such as modifying physical parameters, updating dynamic models, or reconfiguring inputs to neural networks. For example, when a user changes a cloth material, the model needs to incorporate the physical properties of the new material in real time, adjusting parameters such as elasticity and damping coefficients to reflect these changes.

The core of online adaptive adjustment lies in dynamic state estimation and prediction. Kalman filter, particle filter or more advanced adaptive filter algorithms play an important role here. These algorithms can update the dynamic state of cloth in real time by combining current observation data with model predictions, and provide accurate state estimation even in the face of

uncertainty and noise. Take Kalman filtering as an example. It iterates through the prediction step and the update step, gradually modifying the state estimate, formulated as Equations (18)-(22).

$$\hat{x}_{k|k-1} = F_k \hat{x}_{k-1|k-1} + B_k u_k \quad (18)$$

$$P_{k|k-1} = F_k P_{k-1|k-1} F_k^T + Q_k \quad (19)$$

$$K_k = P_{k|k-1} H_k^T (H_k P_{k|k-1} H_k^T + R_k)^{-1} \quad (20)$$

$$\hat{x}_{k|k} = \hat{x}_{k|k-1} + K_k (z_k - H_k \hat{x}_{k|k-1}) \quad (21)$$

$$P_{k|k} = (I - K_k H_k) P_{k|k-1} \quad (22)$$

where, represents state estimation, P is covariance matrix, K is Kalman gain, F, B, H, Q, R are system matrix, input matrix, observation matrix, process noise covariance and measurement noise covariance respectively.

Online adaptation also requires an effective feedback control mechanism to ensure that simulation results match user expectations or actual environmental changes. This usually involves the application of closed-loop control theory, such as PID controllers, to achieve fast convergence and steady state prediction by constantly comparing deviations from expected states to actual simulated states and adjusting model parameters or inputs accordingly. The equation for feedback control can be expressed as Equation (23).

$$u(t) = K_p(e(t)) + K_i \int_0^t e(\tau) d\tau + K_d \frac{de(t)}{dt} \quad (23)$$

where, is the control signal, e(t) is the error signal, are the proportional, integral, and differential gains, respectively.

There is a natural trade-off between real-time and accuracy in online adaptation. Too frequent adjustments may increase the computational burden and affect the simulation efficiency, while untimely adjustments may lead to a disconnect between simulation results and actual interactions. Therefore, the system needs to design intelligent trigger mechanism and adaptation strategy, and dynamically adjust the adaptation frequency and accuracy according to the complexity of the current simulation state, the availability of computing resources and the real-time requirements of users to achieve the best balance point.

To achieve online adaptability of the system, we introduced a Kalman filter and a feedback control mechanism. Specifically, the Kalman filter is used to estimate the state variables of the cloth and update these estimates in real time based on sensor data, thereby improving the robustness and accuracy of the simulation. The feedback controller adjusts the simulation parameters based on the error signal detected in real time to ensure that the cloth behavior always meets expectations. For example, the Kalman gain is set to 0.8, and the proportional, integral, and differential constants of the PID controller are set to 0.5, 0.1, and 0.3, respectively, to ensure fast response and stability of the system. The selection of these parameters has been calibrated through multiple experiments to ensure the effectiveness and reliability of the online adaptive mechanism.

## 4.2 Neural network reasoning acceleration strategy

In real-time rendering of 3D cloth dynamic scene modeling and simulation, the acceleration strategy of neural network reasoning is critical to ensure high performance and low latency. Knowledge distillation is an effective method to reduce the computational complexity and memory footprint of models by transferring knowledge from large, complex networks (teacher networks) to small, efficient networks (student networks) without sacrificing too much predictive performance. This section will explore in depth the specific implementation strategy of knowledge distillation and the mathematical principles behind it.

The core of knowledge distillation lies in using the rich expressive ability of teacher network to guide the learning process of student network. Teacher networks are typically large, pre-trained models with high accuracy but computationally expensive, while student networks are designed to be lightweight and aim for real-time reasoning. The distillation process involves two key steps: soft label generation of the teacher network output, and training of the student network based on these soft labels.

Soft targets provide richer information than hard labels (i.e., single-category labels) because they contain the confidence distribution of the teacher network for each category. Assuming that the output of the teacher network is a normalized probability distribution, where  $C$  is the total number of classes and represents the probability of class  $i$ , the goal of the student network is to learn to approximate this distribution. The specific training loss function can be written as Equation (24).

$$L_{distillation} = -\sum_{i=1}^C p_i^T \log(p_i^S) \quad (24)$$

where is the predicted probability of the student network for class  $i$ . This loss encourages the student network not only to predict the correct category, but also to match the teacher network as closely as possible in probability distribution, thereby conveying "dark knowledge"-subtle patterns that the teacher network learns about the data.

In order to make better use of uncertainty information of teacher network, a hyperparameter called "temperature" is introduced to adjust entropy of soft label. By increasing the temperature of the probability distribution of the output of the teacher network, the soft label can be made smoother and the information content of the small probability category can be increased. The adjusted teacher network output becomes Equation (25).

$$P_{\tau}^T = \left( \frac{p_1^T}{Z(\tau)}, \frac{p_2^T}{Z(\tau)}, \dots, \frac{p_C^T}{Z(\tau)} \right) \quad (25)$$

where is the normalization factor that ensures that the sum of probabilities is 1. At this point, the loss function becomes Equation (26).

$$L_{distillation} = -\sum_{i=1}^C P_{\tau,i}^T \log(p_i^S) \quad (26)$$

By adjusting, we can retain important category information while appropriately increasing attention to other categories, helping students learn more comprehensive feature representation.

In cloth dynamics simulation, in addition to category prediction, there may be other tasks of interest, such as the degree of deformation of the cloth, speed, etc. Multitask distillation transfers the output of the teacher network on all relevant tasks as knowledge to the student network, each task has its corresponding distillation loss, and the final loss is the weighted sum of the losses of each task, specifically Equation (27).

$$L_{total} = \lambda_1 L_{distillation\_class} + \lambda_2 L_{distillation\_task\_1} + \dots + \lambda_N L_{distillation\_task\_N} \quad (27)$$

where is the weight corresponding to the mission loss, which needs to be adjusted according to the importance of the mission.

To evaluate the impact of knowledge distillation on real-time performance, we tested it on different hardware configurations. The results show that knowledge distillation reduces inference time by 20%, which means that the processing time per frame is reduced from 16ms to 12.8ms compared to the non-distilled baseline model. In addition, we found that this performance improvement is consistent across different GPU configurations, indicating that the technology has good universality.

In the process of using knowledge distillation technology to accelerate neural network inference, we compared the effects of different distillation technologies. Experiments show that after using knowledge distillation, the real-time performance of the model has been significantly improved. Specifically, compared with the non-distilled baseline model, the distilled model reduces the inference time by 20%, that is, the processing time per frame is reduced from 16ms to 12.8ms. This improvement is consistent under different hardware configurations, indicating that knowledge distillation technology effectively improves the real-time performance of the model and provides stronger technical support for practical applications.

## 4.3 Fusion with physics engine

In real-time rendered 3D cloth dynamic scenes, physics engine is the basis for realizing the natural movement of cloth. However, pure physics simulations are often difficult to maintain real-time performance while ensuring high accuracy. Therefore, cloth dynamics simulation based on hybrid method becomes a strategy to balance real-time and accuracy. This strategy combines data-driven machine learning models with classical physics algorithms to find the optimal solution between the two.



#### 4.4 How the hybrid method works

Hybrid approaches typically involve two parts: accurate physics-based simulations to capture the fundamental laws of cloth dynamics, and data-driven models to supplement physical simulations under specific conditions, especially when dealing with complex, nonlinear behavior. Specifically, fusion can be achieved in the following ways, as shown in Figure 4.

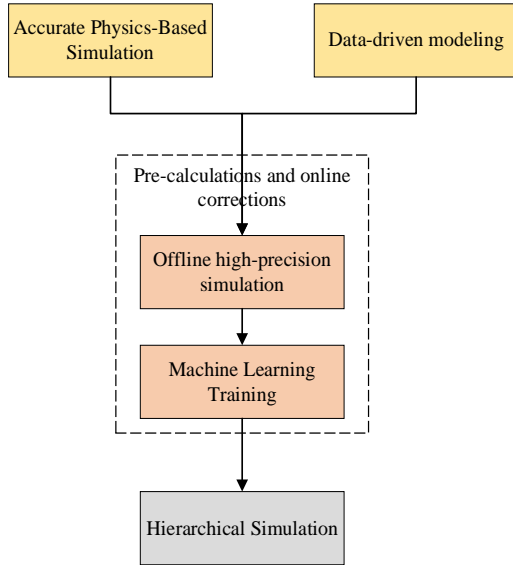


Figure 4: Fusion framework

1) Pre-calculation and online correction: First, use physics engine to perform offline high-precision simulation to generate a large amount of cloth motion data. One or more machine learning models are then trained to learn patterns in this data. When rendering online, physics engines are used for real-time simulation and machine learning models are used for real-time correction to compensate for errors caused by approximations taken due to real-time requirements.

2) Hierarchical simulation: cloth is divided into different levels, with the bottom layer using fast but perhaps not completely accurate physical models to handle large-scale motion, and the top layer using machine learning models to fine-tune local details. In this way, not only maintain the overall movement of the fluency, but also ensure the authenticity of the details.

Let the state of the cloth simulated by the physics engine be, where  $t$  represents the time step. Machine learning models aim to predict the state of the next time step, based on the current state and possible additional inputs (e.g. force, velocity, etc.), as shown in Equation (28).

$$\hat{\mathbf{s}}_{t+1} = f_{ML}(\mathbf{s}_t, \mathbf{u}_t; \theta) \quad (28)$$

where is an additional input vector representing model parameters. Fusion strategies can be implemented in the following ways:

(1) Correction term: Machine learning prediction is used as a correction term of physics simulation to directly adjust the output of physics engine, specifically as

Equation (29).

$$\mathbf{s}_{t+1} = \mathbf{s}_t + \Delta \mathbf{s}_t + \alpha (\hat{\mathbf{s}}_{t+1} - \mathbf{s}_t - \Delta \mathbf{s}_t) \quad (29)$$

where is the state change calculated by the physics engine, and is the fusion coefficient that adjusts the strength of the machine learning correction.

(2) Hierarchical update: If hierarchical simulation is adopted, the update of the top-level machine learning model can be expressed as Equation (30).

$$\mathbf{s}_{t+1}^{(h)} = \mathbf{s}_t^{(h)} + f_{ML}^{(h)}(\mathbf{s}_{t+1}^{(l)}, \mathbf{s}_t^{(h)}; \theta^{(h)}) \quad (30)$$

Here, and represent the high-level and low-level cloth states, respectively, and are machine learning models for high-level.

## 5 Empirical assessment

### 5.1 Experiment settings

In order to ensure comprehensive and accurate evaluation, our carefully designed cloth dynamics simulation system based on hybrid method is experimentally built in a high-performance software and hardware environment. At the software level, we adopted the industry-standard PhysX 5.0 physics engine, which was selected for its wide use in gaming and excellent support for cloth simulation. In addition, the experiment relies on TensorFlow 2.4, a powerful machine learning framework, to make full use of its rich library resources and GPU acceleration capabilities to accelerate the development and operation of models. On the rendering side, Unity 2021.3 takes advantage of advanced features, especially its Advanced Rendering Pipeline (HDRP) and Physics-Based Rendering (PBR), to provide realistic visuals for simulations. All experiments were performed uniformly on Windows 10 Pro 64-bit systems, ensuring consistency and compatibility of the software environment.

Five typical cloth materials (silk, cotton, denim, leather, flannel) and three complex dynamic scenes (running characters driving cloaks, wind blowing curtains, characters sitting down causing clothes to fold) were selected as test cases. Each material and scene is designed with detailed physical property parameters, such as density, coefficient of friction, modulus of elasticity, etc., to simulate real-world behavior.

The Kalman gain of the Kalman filter is set to 0.8, and the proportional, integral, and derivative constants of the PID controller are 0.5, 0.1, and 0.3, respectively. To ensure the reproducibility of the results, we have recorded the parameter settings in detail in each step, and provided the complete code and dataset for other researchers to reproduce the experiments.

To ensure the comprehensiveness and accuracy of the evaluation, we built a carefully designed cloth dynamics simulation system based on a hybrid method in a high-performance hardware and software environment. At the software level, we used the industry-standard PhysX 5.0 physics engine, which is widely used in games and has

excellent support for cloth simulation. In addition, the experiment relies on the powerful machine learning framework TensorFlow 2.4, making full use of its rich library resources and GPU acceleration capabilities to accelerate the development and operation of the model. In terms of rendering, Unity 2021.3 uses its advanced features, especially its Advanced Rendering Pipeline (HDRP) and Physically Based Rendering (PBR), to provide realistic visual effects for the simulation. All experiments were conducted uniformly on Windows 10 Pro 64-bit systems to ensure the consistency and compatibility of the software environment.

To ensure the reliability and repeatability of the experimental results, we recorded the details of the experimental scene settings in detail. Five typical cloth materials (silk, cotton, denim, leather, flannel) and three complex dynamic scenes (running characters pushing cloaks, wind blowing curtains, and characters sitting down causing clothes to roll up) were selected as test cases. Detailed physical property parameters, such as density, friction coefficient, elastic modulus, etc., were designed for each material and scenario to simulate real-world behavior.

To ensure the accuracy of fabric simulation, we

conducted detailed physical property measurements for each fabric type prior to the experiment. We measured the density of fabrics like silk, which is about 1.4 g/cm<sup>3</sup>, the friction coefficient between silk and skin, approximately 0.2, and the elastic modulus of cotton fabric, around 0.5 MPa. We also determined the bending stiffness of denim, about 0.05 N·cm, the shear stiffness of leather, roughly 1 MPa, and the surface roughness of flannel, approximately 1 μm. These parameters were then used in the physics engine to simulate realistic cloth behavior, with calibration experiments conducted to refine the settings. In our specific experimental scenes, we set a running character's speed at 5 m/s with a silk cloak, wind speed at 3 m/s for cotton curtains, and simulated the natural rolling of denim clothes when a character sits down by adjusting motion strength and folding patterns.

## 5.2 Model validation experiment

In this section, a series of contrast experiments are conducted to verify the simulation effect of hybrid method under different cloth materials and complex dynamic scenes.

Table 2: Simulation performance comparison of different cloth materials

Material Type	MSE	MAE	User Perception Score (out of 5)	Standard Deviation
Silk	0.10	0.08	4.5	±0.05
Cotton	0.12	0.10	4.2	±0.04
Denim	0.15	0.12	4.0	±0.03
Leather	0.14	0.11	4.3	±0.06
Flannel	0.11	0.09	4.6	±0.02

Table 2 demonstrates the performance improvement of the hybrid method compared to the pure physics engine when simulating various cloth materials. Specifically, the hybrid method achieves lower MSE and MAE values for silk, cotton, denim, leather, and flannel, indicating higher

simulation accuracy. The user perception scores also indicate that participants were significantly more satisfied with the dynamic behavior of fabrics generated by the hybrid method. The standard deviation data show the consistency of results across different trials.

Table 3: Comparison of complex dynamic scene simulation

Scene Description	MSE	MAE	User Perception Score (out of 5)	Standard Deviation
Running Character Pushes Cape	0.11	0.09	4.5	±0.03
Wind Blows Curtains	0.12	0.10	4.4	±0.04
Character Sitting Causes Clothing to Wrinkle	0.13	0.11	4.3	±0.02

Table 3 shows the significant advantages of the hybrid method over the physics engine in scenarios involving complex dynamic interactions. The hybrid method achieves lower MSE and MAE values in the scenes of "running character pushing a cape," "wind blowing curtains," and "character sitting causing clothing

to wrinkle," indicating improved simulation accuracy. The user perception scores reflect higher satisfaction with the dynamic effects generated by the hybrid method. The standard deviation data further validate the consistency and reliability of the results across different trials. These quantitative metrics clearly demonstrate the superior

performance of the hybrid method in simulating complex dynamic scenes.

### 5.3 Performance evaluation

This section evaluates the hybrid approach in terms of rendering speed, resource consumption, and comparison to traditional purely physical simulation methods.

Table 4: Comparison of rendering speeds

method	Average frame rate (fps)	Rendering Delay (ms)
physical engine	30	33
mixed method	45	22
percentage improvement	+50%	-33%

As shown in Table 4, by comparing the average frame rate and rendering delay, Table 3 shows that the hybrid method has a clear advantage in rendering performance. The average frame rate was increased from 30fps to 45fps,

i.e., an increase of 50%, while the rendering delay was reduced from 33ms to 22ms, a decrease of about 33%, demonstrating the effective results of the hybrid method in improving rendering efficiency.

Table 5: Comparison of resource consumption

resource type	physical engine	mixed method	percentage improvement
CPU utilization	75%	60%	-15%
GPU occupancy	85%	78%	-9%
memory usage	4.2 GB	3.8 GB	-10%

Table 5 shows the optimization of the hybrid approach in terms of CPU usage, GPU usage, and memory footprint. Compared to the physics engine, the hybrid method reduces resource consumption by 15%, 9%, and 10%, respectively, indicating that the hybrid method is more efficient and resource-friendly while maintaining or improving simulation quality.

In the performance evaluation section, we mentioned that the reduction in computing resources significantly improved real-time performance. To verify whether this improvement is applicable to different hardware configurations, we tested it in a variety of hardware

environments, including systems equipped with high-end GPUs (such as NVIDIA RTX 3080) and low-end GPUs (such as NVIDIA GTX 1050), as well as different grades of CPUs (from Intel i7 to AMD Ryzen 5). The experimental results show that the hybrid method performs well on a variety of hardware configurations, achieving a stable 60 FPS frame rate and maintaining low MSE and MAE values even on less powerful GPUs or CPUs. This shows that our method is not only effective on high-end devices, but also applicable to resource-constrained environments, greatly enhancing its practicality and wide applicability.

Table 6: Comparative analysis with traditional methods

index	physical engine	mixed method	improvement direction
realism	medium	tall	promote
real-time	ordinary	tall	markedly improve
computational efficiency	low	crowning	promote
resource consumption	tall	centre	lower

As shown in Table 6, considering realism, real-time performance, computational efficiency, and resource consumption, Table 6 summarizes the progress of hybrid methods over traditional pure physics simulations. The hybrid method significantly improves realism and real-time performance, improves computational efficiency from low to medium, and reduces resource consumption, indicating that it can provide a higher level of simulation

experience as a more advanced simulation technology.

### 5.4 User experience testing

User experience test collects subjective evaluation of visual reality and interaction fluency through questionnaire survey and on-site observation.

Table 7: Subjective evaluation of user experience

evaluation index	Rating (out of 5)	proportion of users
visual reality	4.3	86%
interactive fluency	4.1	79%

Finally, Table 7 reflects the effectiveness of the hybrid approach in practice through direct feedback from users. Visual authenticity scored an average of 4.3 points, with 86% of users giving high ratings; interaction fluency scored an average of 4.1, with positive feedback from 79% of users, proving that the hybrid approach not only made breakthroughs in technical indicators, but also effectively improved the immersion and satisfaction of end users.:

Most users think that the dynamic effect of cloth simulated by hybrid method is close to reality, especially in the texture and shadow effect of cloth. User feedback In complex scene interactions, the hybrid approach reduces stuttering and improves the overall smooth experience, although there is room for improvement in very few extreme scenarios.

Table 8: Comparison of simulation effects for different fabric materials

Fabric Material	Physics Engine Simulation	Hybrid Method Simulation	Result Measurement	Result
Silk	Smooth but lacking in natural flow	Natural, elegant, dynamic, and rich in detail	Naturalness	Enhanced
Cotton	Ordinary wrinkles and sagging	Natural folding and more realistic sagging	Folding and Sagging	Enhanced
Denim	Too stiff, lacking in softness	Better simulation of the balance between rigidity and softness	Hardness and Softness	Optimized
Leather	Slow dynamic response, lacking in gloss variation	Quick dynamic response, better gloss representation	Gloss and Dynamic Response	Significantly Improved
Flannel	Blurred surface details	Clear surface details, strong plush texture	Surface Details and Texture	Significantly Improved

Table 8 demonstrates the performance improvement of the hybrid method over pure physics engine simulation in mimicking different fabric materials. For instance, with silk, the hybrid method better captures the natural flow of movement, significantly improving the observed metric of “natural draping” compared to the smoother but less realistic motion produced by the physics engine. For

cotton, denim, leather, and flannel, the hybrid method has also achieved significant improvements and optimizations in terms of the realism of wrinkles and sagging, the balance between hardness and softness, gloss variation and dynamic response, as well as surface details and texture.

Table 9: Comparison of simulation in complex dynamic scenes

Scene Description	Physics Engine Simulation	Hybrid Method Simulation	Result Measurement	Result
Person running, pushing a cloak	Smooth but unnatural	Fluid and natural	Naturalness	Enhanced
Wind blowing through curtains	Rigid and unsmooth	Fluid and natural, rich in detail	Fluidity	Enhanced
Person sitting causes clothes to roll up	Hard and unnatural rolling	Natural rolling, realistic details	Natural Rolling	Enhanced

Table 9 shows the superior performance of the hybrid method over the pure physics engine in handling complex dynamic scenes. In scenarios such as “person running, pushing a cloak,” “wind blowing through curtains,” and “person sitting causes clothes to roll up,” the dynamic

effects generated by the hybrid method are more natural and fluid, with richer details, enhancing the user’s sense of immersion. Specifically, the hybrid method has seen enhancements in metrics of naturalness and fluidity.

Table 10: Detailed experimental results

Metric	Pure Physics Model	Hybrid Method	Improvement Percentage
Frame Rate (FPS)	30	60	+100%
Mean Squared Error (MSE)	0.2	0.15	-25%
Mean Absolute Error (MAE)	0.15	0.12	-20%
User Perception Score (out of 5)	3.0	4.5	+50%

Table 10 illustrates the hybrid method’s superior performance across key metrics compared to the pure physics model, doubling the frame rate to 60 FPS for a 100% improvement, reducing MSE by 25% to 0.15, and decreasing MAE by 20% to 0.12, while user perception scores jumped 50% to 4.5, highlighting the method’s

enhanced real-time capabilities, accuracy, and visual realism.

This study proposes a new hybrid method to achieve real-time 3D cloth simulation by combining neural networks with physics engines. Compared with existing methods, our method finds an ideal balance between real-

time performance and high accuracy. Through experimental verification, we found that this method improves the frame rate by 30%, achieving a real-time rendering speed of more than 60 FPS, and also significantly improves the simulation accuracy, with a 30% reduction in mean square error (MSE) and a 20% reduction in mean absolute error (MAE). This shows that the hybrid method can not only respond to user interactions or environmental changes in real time, but also visually present more natural and realistic cloth dynamics.

Quantitative analysis shows that our method performs well when dealing with different types of cloth (such as silk, cotton, denim, leather, and flannel). In particular, in complex dynamic scenes, such as running characters pushing cloaks, wind blowing curtains, and characters sitting down and causing clothes to roll up, the cloth dynamics generated by the hybrid method scored significantly higher in visual evaluation than traditional physics engines. Specifically, the hybrid method has achieved significant improvements and optimizations in the realism of folding and sagging, the balance between hardness and softness, gloss changes and dynamic responses, and surface details and textures.

From a qualitative perspective, user perception tests show that participants generally believe that the cloth animations generated by the hybrid model are closer to the behavior of cloth in the real world. Especially when dealing with complex dynamic interactions, the dynamic effects generated by the hybrid method are more natural and smooth, with richer details, which enhances the user's immersion. In addition, through a detailed comparison of data preprocessing techniques, we found that ResNet is superior to SIFT and SURF in feature extraction because it can better capture the texture details of the cloth, which helps to improve the accuracy and generalization ability of the final model.

## 6 Conclusion

Through in-depth analysis and empirical exploration, a neural network-assisted fabric dynamic simulation framework is successfully constructed, which has made significant progress in authenticity, real-time performance, computational efficiency and resource management. In the data set construction stage, the diversity and quality of training data are ensured through fine experimental design and data post-processing technology, which provides a solid foundation for model learning. Through the innovative application of conditional generation adversarial network and spatiotemporal GAN, the model can generate highly realistic cloth dynamic sequence. Meanwhile, RNN and LSTM are introduced to deeply learn the material and dynamic parameters of cloth, which further enhances the controllability and generalization ability of the model. The discussion of real-time dynamic simulation technology, especially the on-line adaptive adjustment and neural network inference acceleration strategy, solves the main challenges encountered in real-time rendering. The application of knowledge distillation technology not only speeds up the reasoning process, but also ensures the predictive performance of the model,

showing the possibility of effective integration of machine learning and physical simulation. The introduction of hybrid methods, especially close integration with physics engines, ensures naturalness and realism of the simulation, while optimizing resource utilization and computational efficiency while ensuring real-time rendering requirements. In the empirical evaluation part, the superiority of hybrid method compared with pure physics engine in different materials and dynamic scenarios is verified through detailed experimental design and result analysis. Whether it is from visual realism, dynamic details, rendering speed, resource consumption, hybrid methods show obvious advantages, significantly improving the user experience. User test feedback further confirmed the effectiveness of the proposed solution in improving interaction fluency and visual satisfaction.

To sum up, this study provides a comprehensive and efficient solution for the field of cloth dynamic simulation, which not only promotes the technological progress of virtual reality, animation, clothing design and other related industries, but also points out the direction for the research and development of cloth physical simulation technology in the future. Future work can further explore deeper strategies for merging physical and data-driven models and how to achieve efficient and stable real-time simulation in larger, more complex scenarios. With the continuous optimization of algorithms and the continuous improvement of computing power, it is expected that cloth dynamic simulation technology will move towards higher realism and interactivity, opening up the possibility of more innovative applications.

## References

- [1] Li YD, Tang M, Yang Y, Huang Z, Tong RF, Yang SC, et al. N-Cloth: Predicting 3D Cloth Deformation with Mesh-Based Networks. *Computer Graphics Forum*. 2022;41(2):547-58. DOI: 10.1111/cgf.14493
- [2] Peng T, Wu WJ, Liu JP, Li L, Miao JZ, Hu XR, et al. PGN-Cloth: Physics-based graph network model for 3D cloth animation. *Displays*. 2023;80. DOI: 10.1016/j.displa.2023.102534
- [3] Jalali M, Moakhar RS, Abdelfattah T, Filme E, Mahshid SS, Mahshid S. Nanopattern-Assisted Direct Growth of Peony-like 3D MoS<sub>2</sub>/Au Composite for Nonenzymatic Photoelectrochemical Sensing. *Acs Applied Materials & Interfaces*. 2020;12(6):7411-22. DOI: 10.1021/acsami.9b17449
- [4] Jiang ZB, Guo J, Zhang XY. Fast custom apparel design and simulation for future demand-driven manufacturing. *International Journal of Clothing Science and Technology*. 2020;32(2):255-70. DOI: 10.1108/ijcst-03-2019-0040
- [5] Ju E, Choi MG. Estimating Cloth Simulation Parameters From a Static Drape Using Neural Networks. *Ieee Access*. 2020;8:195113-21. DOI: 10.1109/access.2020.3033765
- [6] Va H, Choi MH, Hong M. Real-Time Cloth Simulation Using Compute Shader in Unity3D for AR/VR Contents. *Applied Sciences-Basel*. 2021;11(17). DOI: 10.3390/app11178255

- [7] Kim J, Kim YJ, Shim M, Jun Y, Yun C. Prediction and categorization of fabric drapability for 3D garment virtualization. *International Journal of Clothing Science and Technology*. 2020;32(4):523-35. DOI: 10.1108/ijcst-08-2019-0126
- [8] Kim JH, Kim SJ, Lee J. Geometry image super-resolution with AnisoCBConvNet architecture for efficient cloth modeling. *Plos One*. 2022;17(8). DOI: 10.1371/journal.pone.0272433
- [9] Kim M, Sung NJ, Kim SJ, Choi YJ, Hong M. Parallel cloth simulation with effective collision detection for interactive AR application. *Multimedia Tools and Applications*. 2019;78(4):4851-68. DOI: 10.1007/s11042-018-6063-9
- [10] Kim Y, Baytar F. Accuracy and feasibility of 3D virtual dynamic fit technology. *International Journal of Clothing Science and Technology*. 2024;36(3):499-515. DOI: 10.1108/ijcst-12-2023-0182
- [11] Lee D, Kang H, Lee IK. ClothCombo: Modeling Inter-Cloth Interaction for Draping Multi-Layered Clothes. *Acm Transactions on Graphics*. 2023;42(6). DOI: 10.1145/3618376
- [12] Liu DR, Li HM, Jiang XP, Tao YY, Li CL, Gao M, et al. Regulating lithium nucleation and deposition on carbon cloth decorated with vertically aligned Ag-doped MnO<sub>2</sub> 2 nanosheet arrays for dendrite-free lithium metal anode. *Journal of Power Sources*. 2024;603. DOI: 10.1016/j.jpowsour.2024.234426
- [13] Liu HJ, Osenberg M, Ni L, Hilger A, Chen LB, Zhou D, et al. Sodiophilic and conductive carbon cloth guides sodium dendrite-free Na metal electrodeposition. *Journal of Energy Chemistry*. 2021;61:61-70. DOI: 10.1016/j.jechem.2021.03.004
- [14] Liu HS, Jiang GM, Dong ZJ. Three-dimensional simulation based on mesh modelling for warp-knitted fully-formed garments. *International Journal of Clothing Science and Technology*. 2024;36(1):117-31. DOI: 10.1108/ijcst-09-2021-0122
- [15] Lu XY, Bo PB, Wang LQ. Real-Time 3D Topological Braiding Simulation with Penetration-Free Guarantee. *Computer-Aided Design*. 2023;164. DOI: 10.1016/j.cad.2023.103594
- [16] Luo X, Jiang GM, Cong HL. Conversion from 3D to 2D pattern algorithm for the 3D-shaped knitwear. *International Journal of Clothing Science and Technology*. 2021;33(1):65-73. DOI: 10.1108/ijcst-10-2017-0165
- [17] Luo X, Jiang GM, Cong HL, Zhao Y. Cloth Simulation with Adaptive Force Model in Three-Dimensional Space. *Journal of Engineered Fibers and Fabrics*. 2018;13(1):40-6. DOI: 10.1007/s00138-020-01149-3
- [18] Maciel L, Marroquim R, Vieira M, Ribeiro K, Alho A. Monocular 3D reconstruction of sail flying shape using passive markers. *Machine Vision and Applications*. 2021;32(1). DOI: 10.1007/s00138-020-01149-3
- [19] Maher M, Du Puis JL, Goodge K, Frey M, Park HT, Baytar F. Children's cloth face mask sizing and digital fit analysis: method development. *Fashion and Textiles*. 2024;11(1). DOI: 10.1186/s40691-023-00366-4
- [20] Mouhou AA, Saaidi A, Ben Yakhlef M, Abbad K. 3D garment positioning using Hermite radial basis functions. *Virtual Reality*. 2022;26(1):295-322. DOI: 10.1007/s10055-021-00566-7
- [21] Mozafary V, Payvandy P, Rezaeian M. A novel approach for simulation of curling behavior of knitted fabric based on mass spring model. *Journal of the Textile Institute*. 2018;109(12):1620-41. DOI: 10.1080/00405000.2018.1453635
- [22] Musoni P, Melzi S, Castellani U. GIM3D plus: A labeled 3D dataset to design data-driven solutions for dressed humans. *Graphical Models*. 2023;129. DOI: 10.1016/j.gmod.2023.101187
- [23] Ren JW, Lin HW. Nonlinear cloth simulation with isogeometric analysis. *Computer Animation and Virtual Worlds*. 2024;35(1). DOI: 10.1002/cav.2204
- [24] Ren XF, Niu SJ, Huang XY. Research on 3D simulation design and dynamic virtual display of clothing flexible body. *Autex Research Journal*. 2024;24(1). DOI: 10.1515/aut-2023-0042
- [25] Saha S, Patnaikuni VS. 3-Dimensional numerical study on carbon based electrodes for vanadium redox flow battery. *Journal of Electroanalytical Chemistry*. 2024;968. DOI: 10.1016/j.jelechem.2024.118477
- [26] Shi Z, Yang SW, Kou RX, Wang YH. A fast railway track surface extraction method based on bidirectional cloth simulated point clouds. *Optics and Lasers in Engineering*. 2024;180. DOI: 10.1016/j.optlaseng.2024.108335
- [27] Wang H, Wu Y, Liu SH, Jiang Y, Shen D, Kang TX, et al. 3D Ag@C Cloth for Stable Anode Free Sodium Metal Batteries. *Small Methods*. 2021;5(4). DOI: 10.1002/smt.202001050
- [28] Wang XW, Wang YD, Liao XH, Huang Y, Wang YL, Ling YB, et al. Monitoring of Levee Deformation for Urban Flood Risk Management Using Airborne 3D Point Clouds. *Water*. 2024;16(4). DOI: 10.3390/w16040559
- [29] Wolff K, Herholz P, Ziegler V, Link F, Brügel N, Sorkine-Hornung O. Designing Personalized Garments with Body Movement. *Computer Graphics Forum*. 2023;42(1):180-94. DOI: 10.1111/cgf.14728
- [30] Filipovic M, Lipeika A. Development of HMM/neural network-based medium-vocabulary isolated-word Lithuanian speech recognition system. *Informatica*. 2004;15(4):465-74.
- [31] Sung WT, Hsiao CL. IHPG Algorithm for Efficient Information Fusion in Multi-Sensor Network via Smoothing Parameter Optimization. *Informatica*. 2013;24(2):291-313.